Filter Technology




SATA® filter 100 prep TM /101 prep TM /103 prep TM

SATA filter 100 prep/101 prep/103 prep		
Technical Data	Air inlet: G 1/2" female thread	
	Air outlet: 1/4" male thread	
	Max. inlet operating pressure: 10.0 bar	
	Max. outlet operating pressure: 10.0 bar	
	Air flow at 6.0 bar: 800 NI/min	
	Max. ambient temperature: 50 °C	

-		_
Available	versions	
148247	SATA filter 100 prep double-stage sinter filter/fine filter with pressure regulator outlet (1 x 1/4" male thread)	
157412	SATA filter 101 prep single-stage activated charcoal filter to retrofit filter 100 prep to filter 103 prep	10 10 2 5 m
157420	SATA filter 103 prep triple-stage sinter filter/fine filter/activated charcoal filter with pressure regulator and 1 outlet tap (1/4" male thread)	

Spare Parts SATA® filter 103 prep™

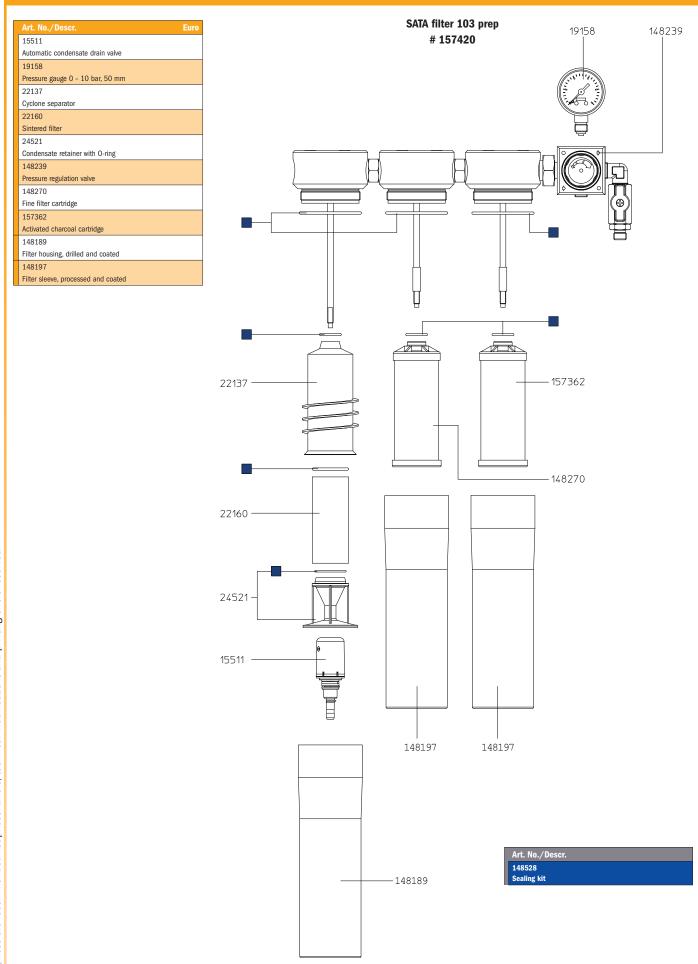


SATA® filter $414^{\text{TM}}/424^{\text{TM}}/434^{\text{TM}}/464^{\text{TM}}$

SATA filter 414/424/434/	101	(Strike)
Technical Data	Air inlet: G 1/2" female thread	
	Air outlet: 1/4 " male thread	SATA filter 424
	Max. inlet operating pressure: 15.0 bar	
	Max. outlet operating pressure: 10.0 bar	
	Air flow at 6.0 bar: 3600 NI/min	SATA
	Max. ambient temperature: 120 °C	
	Max. ambient temperature with activated charcoal: 60 °C	W

	wax. ambient temperature with activated charcoal. 00 °C	
Pressure	regulator/water separator	
92288	SATA pressure reducer 420 with gauge 0-10 bar, air inlet and outlet G 1/2" (female thread)	2
92213	SATA filter 414 single-stage sinter filter without pressure regulator, with outlet module (2 x 1/4" male thread)	i dia
92254	SATA filter 414 L single-stage sinter filter without pressure regulator, for pipeline installation (G 1/2" female thread)	Ų.
92221	SATA filter 424 single-stage sinter filter, pressure regulator, outlet module (2 x 1/4" male thread)	9 11
92262	SATA filter 424 L single-stage sinter filter, pressure regulator, for pipeline installation (G 1/2" female thread)	
Fine filter		
92239	SATA filter 434 single-stage fine filter without pressure regulator, with outlet module (2 x 1/4" male thread)	9 9
92270	SATA filter 434 L single-stage fine filter without pressure regulator for pipeline installation (G 1/2" female thread)	
Activated	charcoal filter to retrofit SATA filter 444	
141473	SATA filter 464 add-on kit single-stage activated charcoal filter without pressure regulator to retrofit SATA filter 444 to SATA filter 484	
92247	SATA filter 464 single-stage activated charcoal filter without pressure regulator, with outlet module (2 x 1/4" male thread)	9 4

Spare parts SATA® filter 424™/464™

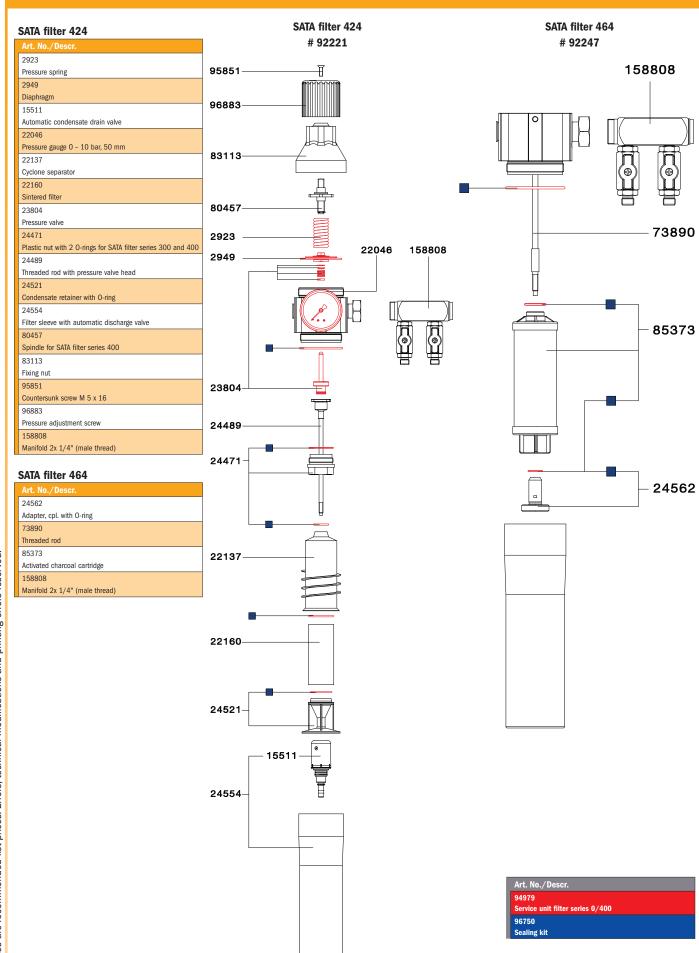

SATA® filter $444^{\text{TM}}/474^{\text{TM}}/484^{\text{TM}}$

SATA filter 400		
Technical Data	Air inlet: G 1/2" female thread	
	Air outlet: 1/4" male thread	
	Max. inlet operating pressure: 15.0 bar	
	Max. outlet operating pressure: 10.0 bar	•
	Air flow at 6.0 bar: 3600 NI/min	
	Max. ambient temperature: 120 °C	
	Max. ambient temperature with activated charcoal: 60 °C	

	·	
Combi filter Euro		
92296	SATA filter 444 double-stage sinter filter/fine filter with pressure regulator and outlet module (2 x 1/4" male thread)	
92833	SATA filter 444 with carrying support double-stage sinter filter/fine filter, pressure regulator, outlet module (2 x 1/4" male thread)	111
92304	SATA filter 444 L double-stage sinter filter/fine filter with pressure regulator, for pipeline installation (G 1/2" female thread)	0
92312	SATA filter 474 double-stage fine filter/activated charcoal without pressure regulator with outlet module (2 x 1/4" male thread)	्रे प ए व
92320	SATA filter 484 triple-stage sinter filter/fine filter/activated charcoal with pressure regulator and outlet module (2 x 1/4" male thread)	
129619	SATA filter 484 with floor carrying support triple-stage sinter filter/fine filter/activated charcoal/floor carrying support with pressure regulator and outlet module (2 x 1/4" male thread)	
173195	SATA filter 484 mobil in a case, sintered filter/fine filter/activated charcoal with pressure regulator, air inlet G 1/2 a, air outlet (2x quick coupling)	

96750

Accessories for SATA® filter series

Filter car	tridges	
22160	Sintered filter for SATA filter series 100, 200, 300 and 400	
22100	Sintered litter for SAIA litter Series 100, 200, 300 and 400	
81810	Fine filter cartridge for SATA filter series 200, 300 and 400	
85373	Activated charcoal cartridge for SATA filter series 200, 300 and 400	
148270	Fine filter cartridge for SATA filter series 100 prep	0
157362	Activated charcoal cartridge for SATA filter series 100 prep	0
138933	Service kit for filter series 400: box for wall mounting with fine filter cartridge and activated charcoal cartridge	
206151	SATA filter timer for sinter filter	The same of the sa
Filter acc	essories	
13599	SATA quick coupling G 1/4" (female thread)	7 E
158824	Manifold for extension with 2 ball valves for SATA filter series 400	9
10934	Ball tap (Teflon) 1/2" male thread for air inlet SATA filter series 100, 300, 400 and cleaning devices	
9878	SATA mini filter 1/4" (male thread)	TATE
Air qualit	y control	
156299	SATA air tester, atomisation air quick tester	
7096	SATA air check set, compressed air quality control device for optimum spray air	
7666	Diaphragm (packing unit 10 pieces) for SATA air check set	
133587	SATA Service Tacho for the paint spray booth, German/English, DIN A3	Societ finite to the Labitation
160713	SATA Service Tacho for the paint spray booth, Spanish/French, DIN A3	E STATE OF THE STA
215053	SATA filter cover (packing unit 4 pieces) for all SATA filter series	